



CAT 6 Consolidation Point CP-96

CP-96 is a economic and effective Cat 6 consolidation point.

Using a 110 type Cat 6 rated cross connect block, it allows terminate and connect up to 96 pairs of Cat 6 22-26 AWG conductors; which is enough for 24 data or voice services

The cross connect block and cable management accessories are enclosed into a metallic cabinet with IP66 rating, that can be mounted either indoor or outdoor. The cabinet can be mounted directly to a wall or to a pole with the use a metallic support that is included. For security the cabinet has a mechanical lock with 3mm thick dual latch

The cross connect block is located in the center of the cabinet, surrounded by cable management accessories to allow for easy routing of cables. It has space for identification.

The **CP-96** comes with all the required accessories and Cat 6 C-4 connector clips for up to 24 Cat 6 data/voice services.

The cabinet has all the accessories to mount on the wall. It includes cable glands, bolts, nuts, cable management accessories, mechanical lock and key. The CP-96 delivers fully assembled and tested.

CP-96 Kit Includes (fully assembled):

- One Metallic Cabinet (7.9x15.75x15.75 in)
- One Cat 6 110 Cross Connect Block, 96 pairs
- 24 x C-4 connector clips
- Set of Identification Labels
- 4 x Cable glands 10-14 mm, 4 x Cable glands 3.6-6 mm
- One Key for mechanic lock
- One set of bolts, nuts and washers
- One Wall Mount Metallic Support





Features

- **Lead Free**
- **RoHS compliant**
- **IDC Connection ETL Verified ANSI/TIA-568-C.2**
- **ANSI/TIA-568-B.2-1**
- **Fire-retardant plastic UL 94V-0;**
- **ISO/IEC 11801 2.2**
- **CENELEC EN 50173-1**
- **CE compliant**
- **ANSI/TIA-1096-A**
- **FCC Part 68**
- **IEC 60603-7-2**
- **IEC 60603-7-4**
- **IEC 60603-7-41**
- **Temperature: -10°C~60°C**
- **Humidity: 10%~90% RH**



UL1863
Communications-Circuit
Accessories



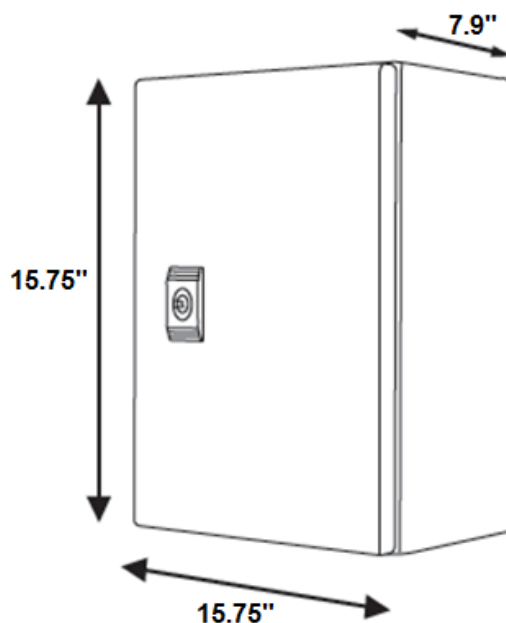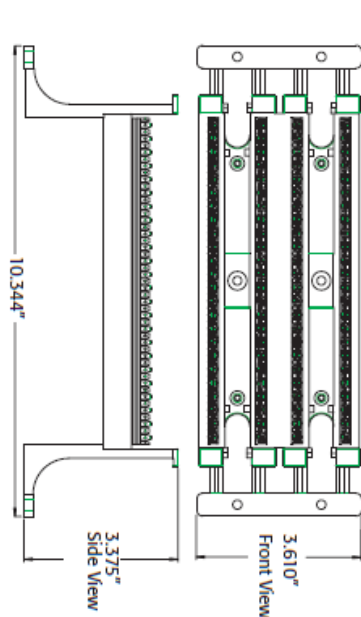

SPECIFICATION	VALUE
Category	6
Pairs	96 Pairs, up to 24 data/voice services
Bandwidth	Up to 500MHz
Connection Type	IDC (Insulation Displacement) ETL Verified, 22-26 AWG
Termination	T568A/T568B
Protection Rating	IP66
Exterior Color	RAL 7032, texturized epoxi-poly
Wall Thickness	1.2 mm
Door Opening	120°, fully reversible
Door Sealing	Foamed Polyurethane
Description	TIA/EIA Category 6 UTP Punchdown 110 IDC, IP66 Consolidation Point, 96 pairs