



SS Splice Sleeves

SS Splice Sleeves are a the complement for perfect fiber optic splices.



SS Splice Sleeves will protect firmly the fiber optic splices

This products is made up of cross linked polyolefin heat-shrinkable tubes, hot melt tubes and Stainless steel reinforcement member.

It is specifically designed for the protection of naked fibers 250 μ m and 900 μ m

Clear color allows splice visual inspection.

- Clear color
- 1.5 mm stainless steel member diameter.
- Transparent tube,it is easy to see the status of fiber optical closure
- Min.shrinks temperatuer:120°C,shrink very fast and very easy to installation
- Work temperature high (-55°C~100°C), widely used
- Sealing structure let closure have good resistance to temperature and humidity performance.

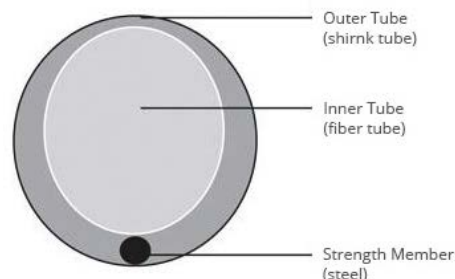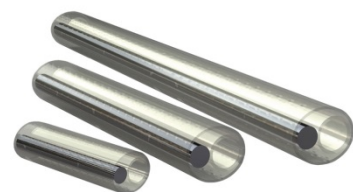

Features

- **RoHS compliant**
- **UL 94 V-0**
- **GR326-CORE**
- **TIA/EIA 310-D**
- **CEA 310**
- **ANSI/TIA/EIA 568B.2**
- **ANSI/ICEA S-102-700**
- **DIN 41494-7**
- **ISO/IEC 11801**
- **DIN 41494-8**
- **NEMA WC66**
- **IEC 60297**
- **EN 50173-1**
- **IEC 60297-3-100**
- **IEC 60297-3-101**
- **IEC 60297-3-102**
- **IEC 60297-3-103**
- **IEC 60297-3-104**
- **IEC 60297-3-105**
- **TIA/EIA 598**
- **Temperature: -55°C~100°C**
- **Humidity: 0%~95% RH**

MODEL	DESCRIPTION
SS40	40 mm splice sleeve / 10 mm
SS50	50 mm splice sleeve/ 10 mm
SS60	60 mm splice sleeve/ 10 mm



UL1863
Communications-Circuit
Accessories

